

GRANDE SERIES

MODEL G24SP/G24LP/G24FL



G24SP: 24 gauge door, 20" X 14"
Ultra high definition short panel (SP)



G24LP: 24 gauge door, 43" X 14"
Ultra high definition long panel (LP)



G24FL: 24 gauge door, flush panel (FL)



G24LP Shown with optional Sherwood Door Lites

G24SP Shown with optional Sunburst 4 Door Lites



www.firstudt.com



The Grande Series is undeniably the best in its class. Manufactured with the most durable materials and finished with ultra high definition raised panels or the flush look of the G24FL. This, plus the deeply embossed woodgrain texture, guarantee that the Grande Series will add value and style to upscale homes.

800 W. Carver, Suite #115 • Tempe, Az 85284 • Phone: 480-705-6632 • Fax: 480-705-8497

Grande Series Model G24SP, G24LP & G24FL

• Superior Value • Versatile Design

High quality, 24 gauge 2-inch thick uninsulated steel door. The Grande Series sets the standard by which all other doors of this type are measured; it is undeniably the best in its class.

Specifications: Sections are 2 inches thick in 21- and 18-inch heights. Each section is manufactured from 24 gauge hot-dipped galvanized steel. Sections are pre-painted white and rotary embossed with a woodgrain texture. Ultra high definition raised panels are pressed in 1/8" height increments to a depth of .375". Tongue and groove-meeting rails are roll formed into the panel, incorporating the RITS™ reinforced integral truss system. Vertical stile members are 19 gauge hot-dipped galvanized I-beams pre-painted white to match the interior side of the section. Stiles are riveted and bonded to the interior face of the door with an epoxy-based cement. Bottom sections are reinforced with aluminum "L" angle and bonded to the bottom of the section for supporting a replaceable UV protected bottom weather seal. H-2 Hardware and Track; Hinges are hot-dipped galvanized, 14 gauge wide body end roller hinges and 16 gauge interior hinges. Rollers are 2-inch black nylon, galvanized torsion tube, self-locking fasteners, pre-painted springs and inside slide lock.




Optional Energy Efficient Insulation

CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option.



Exclusive RITS™ Design


Exclusive RITS™ "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.




Reinforced Aluminum Bottom Extrusion

Heavy duty "U" type weather seal is set into an aluminum reinforced "L" angle, and bonded to the bottom section.

Ten Coat Rust Protection

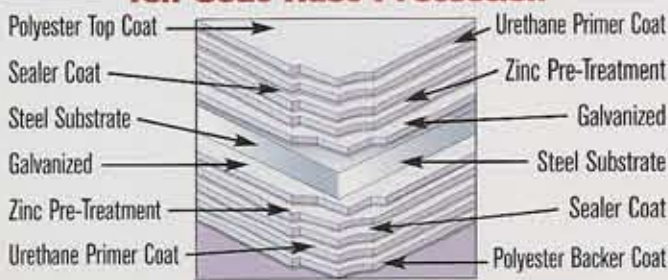

Available in: White Almond Sandstone



I-Beam Center Stiles


Pre-painted I-beam center stiles are engineered to reinforce the construction of the section and designed to eliminate the use of plastic reinforcement angles when the section is post insulated.

WARRANTY

First United Door Technologies warrants each garage door and component parts to be free from defects in material and workmanship to the original purchaser. A copy of this warranty is available upon request.

Upgrade Options:

Glass Designs: 2 panel, 3 panel, 4 panel & 8 panel designs

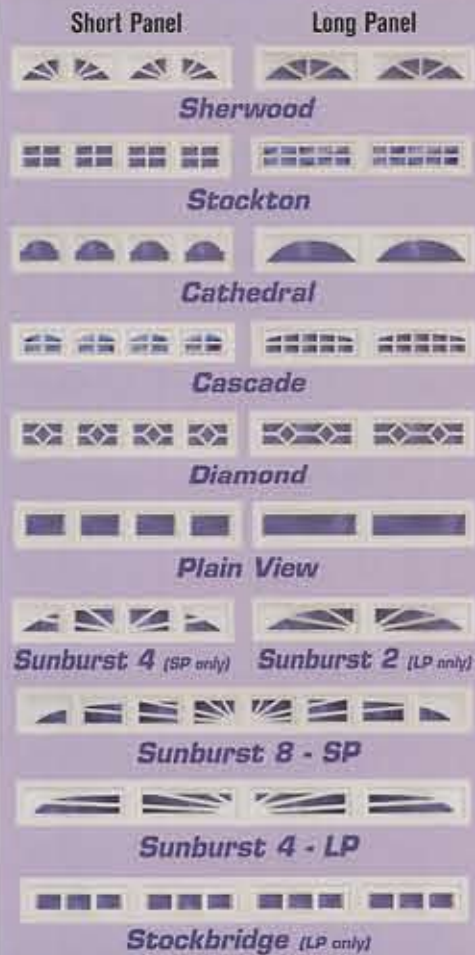

Hardware: H-3 Optional hardware includes 14 gauge commercial hinges throughout. Commercial top fixtures and heavy-duty bottom fixtures, 10 ball white nylon rollers, double lift handles, inside slide lock, back-ling fasteners, pre-painted springs, galvanized torsion tube, .051 gauge Vertical track and .060 gauge Horizontal track.

Insulation: CFC free Polystyrene insulation with a rigid high impact vinyl back skin, with an R-factor of 6.25.

Widths & Heights.
Widths: 6', 8', 9', 10', 12', 14', 15'-1" (SP), 15'-4" (LP), 16', 18', & 20'
Heights: 6', 6'-3", 6'-6", 6'-9", 7', 7'-6", 7'-9", 8'

